


# LANIER

## Pro C9200 Series

Graphic Arts Edition

### Color Sheet-Fed Printer

- Printer
- Copier
- Facsimile
- Scanner

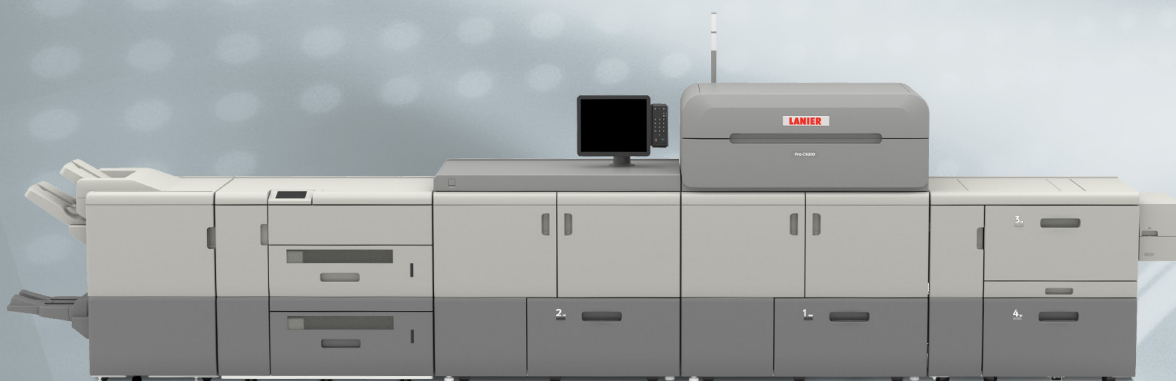

Pro C9200

115 ppm  
monochrome  
and full-color

Pro C9210

135 ppm  
monochrome  
and full-color

# Lanier Pro C9200/C9210

## SYSTEM SPECIFICATIONS

### Hardware Specification

Process	4-drum dry electrostatic transfer system with internal transfer belt
Fusing	Oil-less belt-fusing method
Engine Speed	Pro C9200-115 ppm (8.5" x 11") Pro C9210-135 ppm (8.5" x 11")
Max Monthly Volume	1,000K
Duty Cycle	1,750K
Laser Resolution	2400 x 4800 dpi VCSEL
Warm-Up Time	Less than 540 sec.
Limitless Paper Supply	Supported
Paper Size	13" x 19.2"/13" x 49.6" (when using Oversize Tray Option) 12.7"x18.9"/12.7" x 49.4" (when using Oversize Tray Option)
Maximum Printable Area	
Paper Weight	Trays 1-4: 52-470g/m <sup>2</sup> Duplex: 52-470g/m <sup>2</sup> Trays 5-8: 52-400g/m <sup>2</sup> Bypass Tray: 52-216g/m <sup>2</sup>
Paper Type	Uncoated Paper, Coated Paper (gloss and matte), Recycled Paper, Preprinted, Letterhead, Pre-punched, Tab Stock, Textured Paper, Label Paper, Carbonless Paper
Paper Capacity	Trays 1- 8 : 2,200 sheets per tray Bypass Tray: 500 sheets Total Standard Capacity: 4,400 sheets Total Optional Capacity: 18,100 sheets
Power Source	208-240V, less than 60A (30A x 2), 50/60 Hz
Max. Power Consumption	Less than 9,000W
Typical Electricity Consumption (TEC)*	Pro C9210: 39.3kWh/week Pro C9200: 36.2kWh/week
*Typical Electricity Consumption by ENERGY STAR® program	
ENERGY STAR EPEAT	Certified Gold (TotalFlow Server R-62) Silver (E-85 Controller)
Dimensions (W x D x H)	99.2" x 39" x 59" Height: 73.6" when including status pole Less than 2,373 lb.

### Printer Controllers

#### EFI Color Controller E-85

Fiery System Version	Fiery F5300 Pro
Configuration	External
Memory	16GB (4GB x 4)
CPU	Intel Xeon E5-2637 (3.5 GHz up to 3.7 GHz with turbo)
HDD	500 GB + 2 x 2 TB SATA
Operating System	Windows 10 IoT Enterprise 2016 LTSB

#### TotalFlow Server R-62

Configuration	External
Memory	Standard 32GB (4GB x 8) Additional 32GB (16GB x 2 (Optional))
CPU	Intel Processor 6th Gen Core i7 6700 3.4GHz
HDD	3TB (1TB SATA x 3)
Operating System	Linux
IPDS	Optional

### Hardware Accessories

#### Plockmatic HCI3500 High Capacity Interposer

Dimensions (W x D x H)	47.2" x 28.7" x 43"
Weight	551 lb.
Paper Size	Maximum up to 13" x 26"
Paper Weight	65-350gsm
Paper Capacity	3,500 sheets (1,750 sheets per tray)

#### Plockmatic MPS - Oversize Sheet Stacker

Dimensions (W x D x H)	35.4" x 26.8" x 41.8" (width extends to max 55")
Weight	172 lb.
Power Supply	100-240 V, 50-60 Hz
Paper Size	8.5"x11" (LEF) - 13" x 49.6"
Paper Weight	150-470 gsm
Paper Capacity	2,000 sheets

#### Vacuum Feed Large Capacity Tray (LCIT RT5120)

Dimensions (W x D x H)	41.5" x 28.7" x 39.4"
Weight	Less than 508 lb.
Power Consumption	Less than 1,000 W
Power Supply	100-120 V
Paper Size	5.5" x 8.5" - 13" x 19.2"
Paper Capacity	4,400 sheets (2,200 sheets per tray)
Paper Weight	Trays 3-4: 52-470g/m <sup>2</sup> Trays 5-8: 52-400g/m <sup>2</sup>

#### Vacuum Feed Oversize Tray Type 59

Dimensions (W x D x H)	When attached to the LCIT RT5120 the dimensions become 50.8" x 28.7" x 39.4" Maximum up to 13" x 27.5"
Paper Size	Paper Weight: 52-400g/m <sup>2</sup>
Paper Weight	730 sheets

#### Multi Bypass Tray Unit (BY5020)

Power Source	From LCIT RT5120
Paper Capacity	500 sheets
Paper Size	5.5" x 8.5" - 13" x 19.2"
	Maximum Paper size extend up to 13" x 49.6" with Multi Bypass Oversize
Tray Option	
Paper Weight	52-216g/m <sup>2</sup>

#### 3,000 Sheets Finisher with 100 Sheets Stapler (SR5050)

Capacity (Proof Tray)	250 sheets (8.5" x 11" or smaller) 50 sheets (8.5" x 14" or larger)
Capacity (Shift Tray)	8.5" x 11" - 3,000 sheets 8.5" x 14" - 11" x 17" - 1,500 sheets 12" x 18" - 13" x 19.2" - 1,000 sheets
Paper Weight	Proof Tray: 52-216g/m <sup>2</sup> Shift Tray: 52-470g/m <sup>2</sup>
Output Jogger Staple	Standard 8.5" x 11" - 2 to 100 sheets 8.5" x 14" - 11" x 17" - 2 to 50 sheets
Staple Position	Top, Bottom, 2 Staples, Top Slant
Dimensions (WxDxH)	39.2" x 28.7" x 44.3" (996 x 730 x 1,126 mm)
Weight	246 lbs. (112 kg)

#### Booklet Finisher (SR5060)

Capacity (Proof Tray)	250 sheets (8.5" x 11" or smaller) 50 sheets (8.5" x 14" or larger)
Capacity (Shift Tray)	8.5" x 11" - 2,500 sheets 8.5" x 14" - 11" x 17" - 1,500 sheets 12" x 18" - 13" x 19.2" - 1,000 sheets
Output Jogger	Standard
Paper Weight	Proof Tray: 52-216g/m <sup>2</sup> Shift Tray: 52-470g/m <sup>2</sup>
Staple	8.5" x 11" - 2 to 100 sheets 8.5" x 14" - 11" x 17" - 2 to 50 sheets
Staple Position	Top, Bottom, 2 Staples, Top Slant
Saddle Stitch Staple	8.5" x 11" - 13" x 19.2" - 20 sheets; Center 2 Position
Dimensions (WxDxH)	39.2" x 28.7" x 44.3" (996 x 730 x 1,126 mm)
Weight	246 lbs. (112 kg)

#### Booklet Trimmer (TR5040)

Trimming Type	One Side Edge
Trimming Capacity	1 to 20 sheets (2 to 40 pages after folding)
Paper Size	Up to 13" x 19.2"
Stack Capacity	Up to 60 sets
Limitless Stack	Yes
Dimensions (WxDxH)	43.9" x 23.3" x 21.8" (1,115 x 591 x 555 mm)
Weight	165 lbs. (75 kg)

#### Cover Interposer Tray (CI5030)

Paper Size	5.5" x 8.5" - 13" x 19.2"
Paper Weight	64-216g/m <sup>2</sup>
Stack Capacity	200 sheets x 2 trays
Dimensions (WxDxH)	21.2" x 28.7" x 50.8" (540 x 730 x 1,290 mm)
Weight	99 lbs. (45 kg)

#### Ring Binder (RB5020)

Paper Size	8.5" x 11"/A4
Paper Weight	64-216g/m <sup>2</sup>
Stack Capacity	Binding Mode: 11 sets; Punching Mode: 100 sheets
Ring Bind Capacity	2 to 100 sheets
Number of Holes	LTR - 21, A4 - 23
Ring Supply	Black or White, Up to 50 or 100 sheets
Tab Stock	Supported
Dimensions (WxDxH)	34.2" x 28.7" x 39.8" (870 x 730 x 1,010 mm)
Weight	308 lbs. (140 kg)

#### Perfect Binder (GB5010)

Booklet Size	Width: 7.9" x 11.7" (201-297 mm); Length: 5.5" x 8.5" (140-216 mm)
Booklet Thickness	Less than 1" (23 mm)
Body Page Capacity	200 sheets
Cutting Directions	3 Edges, 1 Edge, None
Paper Weight	Body Pages: 64-163g/m <sup>2</sup> Cover Pages: 90-300g/m <sup>2</sup>
Stack Capacity/Booklet	50 sheets: 13; 100 sheets: 7; 200 sheets: 4
Dimensions (WxDxH)	42.9" x 31.1" x 54.6" (1,090 x 791 x 1,387 mm)
Weight	770 lbs. (350 kg)

#### 6-Position Multi-Folding Unit (FD5020)

Folding Type	Single Sheet Mode: Z-Fold, Half-Fold/ Print inside, Half-Fold/Print outside, Letter Fold-in/Print inside, Letter Fold-in/ Print outside, Letter Fold-out, Double Parallel/Print inside, Double Parallel/ Print outside, Gate-Fold/Print inside, Gate-Fold/Print outside
Paper Size	Multiple Sheets Mode: Half-Fold/Print inside, Half-Fold/Print outside, Letter Fold-in/Print inside, Letter Fold-in/Print outside, Letter Fold-out Single Sheet Mode: Z folding: 8.5" x 11" - 12" x 18"; Half folding: 8.5" x 11" - 13" x 19.2"; Letter folding: 8.5" x 11" Multiple Sheets Mode: Double Parallel folding: 8.5" x 11" - 12" x 18"; Gate folding: 8.5" x 11" to 12" x 18"; Half folding: 8.5" x 11" - 13" x 19.2"; Letter Fold-out: 8.5" x 11"; Letter Fold-in: 8.5" x 11"
Dimensions (WxDxH)	18.5" x 28.7" x 39.4" (470 x 730 x 1,000 mm)
Weight	203 lbs. (92 kg)

#### Plockmatic Booklet Maker (PBM350/PBM500)

Paper Size	8.5" x 11" - 12" x 18"
Paper Weight	64-300g/m <sup>2</sup>
Set Size	PBM350 - 2-35 sheets (80g/m <sup>2</sup> ) PBM500 - 2-50 sheets (80g/m <sup>2</sup> )
Power Supply	115 V, 60 Hz
Dimensions (WxDxH)	55.9" x 35.4" x 27.6" (1,420 x 970 x 700 mm)
Weight	297 lbs. (135 kg)

#### GBC StreamPunch Ultra

Punched Paper Sizes	5.5" x 8.5", 8.5"x11", 8.5"x14", 11"x17", 12"x18"
Punched Media Weight Range	75-300g/m <sup>2</sup>
Tab Punching	Yes
"Two-Up" Punching	Yes
Power Supply	115 V, 60 Hz
Dimensions (WxDxH)	17.5" x 35.4" x 39.4" (445 x 730 x 1,000 mm)
Weight	220 lbs. (100 kg)

#### High Capacity Stacker (SK5040)

Dimensions (W x D x H)	35.4" x 28.7" x 39.8"
Weight	Stacker: 264 lb.; Rollaway cart: 33 lb.
Power Consumption	Less than 132 W
Power Supply	120 V, 50/60 Hz
Paper Capacity	5,000 sheets; Proof tray: 250 sheets
Paper Weight	52-470g/m <sup>2</sup>
Output Jogger	Standard
Rollaway Cart	Standard, optional additional carts available

### Consumables

CMYK Toners	Black yield: 59.8K prints/bottle; CMY yield: 60.5K prints/bottle*
Waste Toner Bottle	Yield: 220K prints/bottle*

\*Based on 8.75% coverage (LT)

TCRU Program Supported

### Workflow Solutions Supported

ProcessDirector®, TotalFlow Prep, TotalFlow Production Manager, TotalFlow BatchBuilder, @Remote, EFI DigitalStoreFront®, CGS/ORIS Lynx & Evaluate, EFI Color Profiler Suite, EFI Fiery Graphic Arts Package Premium Edition, DirectSmile®, EFI Fiery Central, Objectif Lune

Specifications subject to change without notice.  
Contact Lanier for a list of certified media.

[www.lanier.com](http://www.lanier.com)

Ricoh USA, Inc., 70 Valley Stream Parkway, Malvern, PA 19355, 1-855-5-LANIER  
©2018 Ricoh USA, Inc. All rights reserved. Lanier® and the Lanier logo are trademarks of Ricoh USA, Inc. Ricoh® and the Ricoh Logo are registered trademarks of Ricoh Company Ltd. All other trademarks are the property of their respective owners. Lanier products and services are offered by Ricoh USA, Inc. and its affiliates. The content of this document, and the appearance, features and specifications of Lanier products and services are subject to change from time to time without notice. Products are shown with optional features. While care has been taken to ensure the accuracy of this information, Ricoh makes no representation or warranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Lanier products and services are as set forth in the express warranty statements accompanying them.

